
RECORDERS OFFICE JONES COUNTY IOWA

05 JAN 21 AM 9: 59

MARIE KRUTZFIELD RECORDER 700 pd

PREPARED BY HALL & HALL ENGINEERS, INC. 209 29TH STREET N.E. CEDAR RAPIDS, IOWA 52402 (319) 362-9548

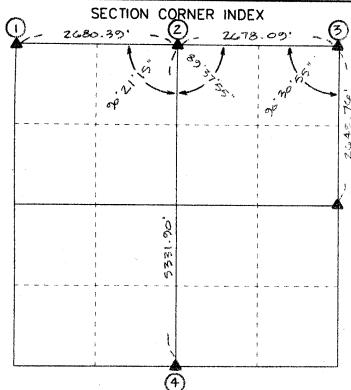

U.S. PUBLIC LAND SURVEY CORNER CERTIFICATE LAND SURVEY MONUMENTS SITUATED IN SECTION 100, TOWNSHIP 83 NORTH, RANGE 4 WEST, OF THE FIFTH PRINCIPAL MERIDIAN, 100 COUNTY 10WA.

REASON FOR PREPARING CERTIFICATE:

- THERE IS NO CERTIFICATE FOR THE CORNER ON FILE WITH THE RECORDER OF THE COUNTY IN WHICH THE CORNER IS LOCATED.
- CORNER POSITION DIFFERS FROM THAT SHOWN IN THE PUBLIC RECORDS OF THE COUNTY IN WHICH THE CORNER IS LOCATED.

 THE CORNER MONUMENT HAS BEEN REPLACED OR MODIFIED.
- C)
- THE REFERENCE TIES REFERRED TO IN AN EXISTING PUBLIC RECORD ARE INCORRECT OR MISSING. D)



I hereby certify that this land surveying document was prepared and the related survey work was performed by me or under my direct personal supervision and that I am a duly licensed Land Surveyor under the laws of the State of Iowa.

Date Daniel J. Johnson 1, 3, 11954 My license renewadiate is December 31, 2006 <u>1-20-05</u>

1) Hav. GOR. SEC. 16-83-4, Fp. S.C. M. Z-O DEEP SET S/B" IRON PINT ON SOUTH FACE OF MONUMENT 51.64' 38.82 34.98 - True 50TH ST. NOTE: ALL TIES FO. NAIL IN TOP OF FENCE POSTS 83417e 12005. 40 (2) H.1/4 COR. SEC. 16-83-4, FD. BROKEN OFF 5.6.14. 2.0' PEEP 2'T HOUTH OF CENTERLINE RO. IN LINE WITH FEACE SOUTH, SET 1/2"
REGAR ON SOUTH FACE OF MONUMENT 12525 HALL AND HALL DISK.
IN TOP OF CEDAR BOT 31.62 SOTH 57. 39.59 35.79 HALL AND HALL DISK IN TOP OF CATE POST HALL NO HALL DISK IN TOP OF ERACE TOP OF BUS FOST 012005-46

3 N.E. COR., SEC. 16-83-4, FD. BROKEN OFF S.C.M. 18" DEEP 0.2" SOUTH OF EAST-WEST FENCE, SET 1/2" MENOR ON SOUTH FACE OF MONUMENT 935 48.38 48.13 26.99 834/160-012005 TIE

4 5.1/4 CORNER, SEC. 16-83-4 FD. S.G.M. ABOVE SURFACE ON EAST. WEST FENCE Z'EAST OF NORTH - SOUTH FENCE, SET 1/2" REBAR ON NORTH FACE OF MONIDMENT 1259 < 10.23 15.85 4-19-834/2/cf 012005.70 NOTE: SET HALL AND HALL SURVEY DISKS

HIEHAUS

Scale: Date: ム/さッ/oろ Project No: ield Book No: Drawn by: Approved by: に入し Checked by: ワン)

THIS IS NOT A CERTIFICATION

JONES COUNTY ENGINEER'S OFFICE, 19501 HWY. 64, ANAMOSA, IOWA, 52205 (319)462-3785

UNITED STATES PUBLIC LAND SURVEY CORNER CERTIFICATE

LAND SURVEY MONUMENTS SITUATED IN SECTION 16, TOWNSHIP 83 NORTH, RANGE 4 WEST OF THE 5TH P.M., JONES COUNTY, IOWA

CORNEDS TO DE INDEVED	
CORNERS TO BE INDEXED	CORNERS TO BE INDEXED
CORNER SECTION TOWNSHIP RANGE N-QUARTER 16 83N 4W	CORNER SECTION TOWNSHIP RANGE
OFFICE FILE NO.	
83416c_081103.jpg	OFFICE FILE NO.
1936 INFORMATION	
x x x x x x x x x x x x x x x x x x x	
50TH STREET 16.1' 126.04 ABOVE SETONE	
50TH STREET NY SCM ABOVE	
STONE	
21.9'	
505	
<u> </u>	
COUNTY SURVEY CREW 1936:	
KIRCHOFF	
' /	
ENGINEER'S CORNER STONE BOOK	DDE//OUGLY DECORDED IN DOOR
PREVIOUSLY RECORDED IN BOOK_#6, PAGE_48_ MONUMENT DESCRIPTION AND HOW ESTABLISHED FOUND STONE 6"	PREVIOUSLY RECORDED IN BOOK, PAGE MONUMENT DESCRIPTION AND HOW ESTABLISHED
IDELOW SURFACE ON CENTERINE OF DOAD LOWEDED STONE TO 4 52 DELOW	
SURFACE, SET STANDARD CONCRETE MONUMENT DIRECTLY ABOVE WITH TOP 12" BELOW SURFACE. TIES AS INDICATED, NORTH QUARTER CORNER SECTION 16,	
TOWNSHIP 83 NORTH, RANGE 4 WEST OF 5TH PM, JONES COUNTY, IOWA.	
CORNERS TO BE INDEXED	CODNEDC TO DE MOSVED
CORNER SECTION TOWNSHIP RANGE	CORNERS TO BE INDEXED
SESTION TOWNSHIP TRANSE	CORNER SECTION TOWNSHIP RANGE
OFFICE FILE NO.	OFFICE FILE NO.
NO SCALE	NO SCALE
	٦]
	·
	·
PREVIOUSLY RECORDED IN BOOK DAGE	
PREVIOUSLY RECORDED IN BOOK, PAGE MONUMENT DESCRIPTION AND HOW ESTABLISHED	PREVIOUSLY RECORDED IN BOOK, PAGE
	MONUMENT DESCRIPTION AND HOW ESTABLISHED
hereby declare that this plat, survey or repo	seal JONES COUNTY
was made by me or under my direct personal	ENGINEER'S OFFICE
supervision and that I am a duly registered La	nd
Surveyor under the laws of the State of lowa.	
Signed:	
	19501 HWY. 64,
	ANAMOSA, IOWA,
	52205 (319)462-3785