2006 0301

FILED RECORDERS OFFICE JONES COUNTY 10W/


06 JAN 23 AM 8: 48

MARIE KRUTZFIELD RECORDER 7.00 Pd

J.D. TJEPKES LS, 23428 RIDGE RD. ANAMOSA, IOWA, 52205 (319)462-6067

## UNITED STATES PUBLIC LAND SURVEY CORNER CERTIFICATE

LAND SURVEY MONUMENTS SITUATED IN SECTION\_5\_, TOWNSHIP\_86 NORTH, RANGE\_2\_WEST OF THE 5TH P.M., JONES COUNTY, IOWA

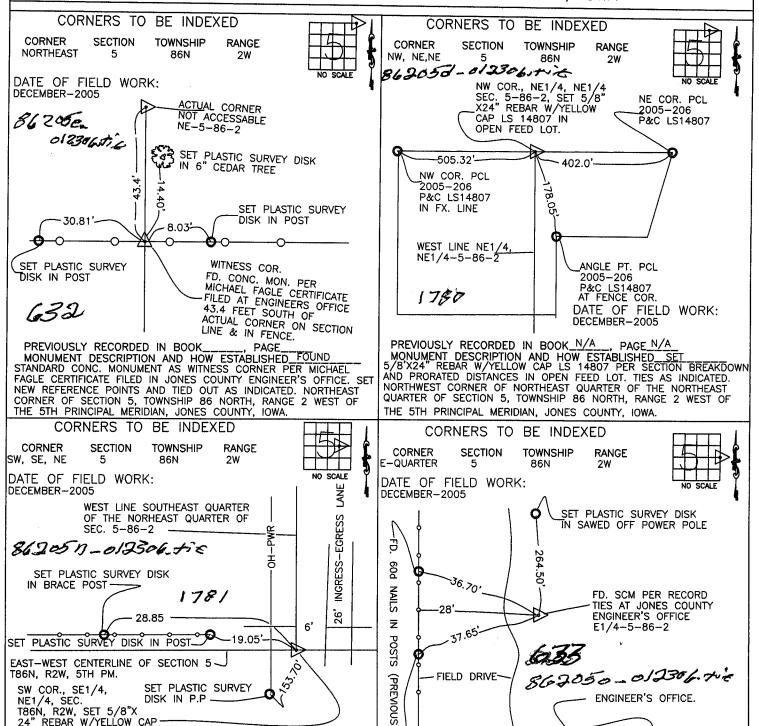

## UNITED STATES PUBLIC SECTION CORNER CERTIFICATION AND LAND CORNER SURVEY T-86N R-2W SECTION 5

MADE FOR

IOWA DEPARTMENT OF TRANSPORTATION FOR THE PURPOSE OF RIGHT OF WAY DESCRIPTIONS ON PRIMARY ROAD No. U.S. 151 MADE BY

MICHAEL R. FAGLE JONES COUNTY, IOWA


R.L.S. No. 8505 NHS-151-3(84)--19-57

**APRIL** 1998

THRU

OCTOBER 1998

ALL DISTANCES WERE CAREFULLY MEASURED AND MAY NOT AGREE WITH ROAD SURVEY STATIONING

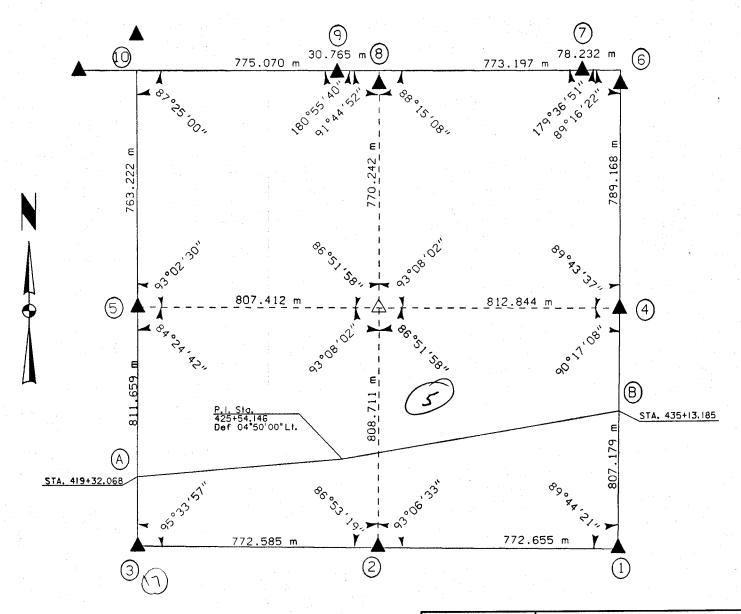





I hereby certify that this Land Surveying document was prepared by me or under my direct personal supervision and that I am a duly Licensed Land Surveyor under the laws of the State of Iowa.


MICHAEL R. FAGLE Date

MICHAEL R. FAGLE

License number 8505

My license renewal date is December 31,2000 Pages or sheets covered by this seal:

## UNITED STATES PUBLIC SECTION CORNER CERTIFICATION CORNER SURVEY NHS-151-3(84)-19-5 T-86N R-2W SECTION <del>9//</del>4 COR SEC **₺**-86-2W COR SEC X-86-2W (3) SE COR SEC 5-86-2W NE Ny Sec. 8 "X" NAILS FENCE POST "X" NAILS TOP FENCE POST المر*ه* دن) PIN W/ CAP "X" NAILS FENCE POST "X" NAILS TOP VALLEY "X" NAILS TOP FENCE POST BARN "X" NAILS FENCE POST 95.07 "X" NAILS TOP FND (DOT PIN W/ CAP NE "X" NAILS FENCE POST "X" NAILS TOF 759.61 NAILS ors d CONC. MON. - 0.10' DEEP FND FND CONC ₩ 1/4 COR SEC 8-86-2W 6 NE COR SEC 5-86-2W (5) 4 COR SEC 5-86-2W EH opol "X" NAILS FENCE POST own 401 "X" NAILS FENCE POST 39,10 "X" NAILS & (on) 44.88 "X" NAILS FENCE POST NAIL IN STEEL POST "X" NAILS COR POST NAIL IN STEEL POST 13.60 "X" NAILS CEDAR TREE 45.07 "X" NAILS CEDAR TREE "X" NAILS FENCE POST 24.10 NAIL IN STEEL POST "X" NAILS CEDAR TREE "X" NAILS FENCE POST FND CONG. MON. - 0.20' ABOVE GROUND 43.40' SOUTH OF LINE CONC. MON. - 0.10' DEEP FND CONC. MON. - 1.0' DEEP S ¼ COR SEC (9)SE COR SEC 32-87-2W (8) N 1/4 COR SEC 5-86-2W



(1)

